

# MASTERVIM

— Industry Technology —

E: info@mastervim.com P: +86 532 87680085  
F: +86 532 87680085 W: www.mastervim.com  
A: No.77 Hushan Road Licang District Qingdao 266000 China



## CATALOG



◆ 优化管理，质量追求零缺陷；  
Optimized management, zero-defect quality

◆ 持续改进，顾客满意百分百。  
Continuous improvement, 100% Customer Satisfaction

## BUSINESS PHILOSOPHY

经营理念



◆ 所有产品均自主设计，模具自主制造  
All Products are designed independently and the mould is manufactured independently

# MASTERVIM

— Industry Technology —

**PRODUCTION CENTER**  
生产中心



**开拓一流管理**  
Build first-class Management

**制造一流产品**  
Manufacture top-class Products


**提供一流服务**  
Provide Sophisticated Services

- ◆ 拥有各种吨位的普通冲床、大型双点闭式冲床、精冲机床、大型液压机60多台
  - ◆ 拥有连续生产区、精冲生产区、覆盖件生产区、单冲生产区
- Has a variety of ordinary punch, large double point press, precision punching machine, large hydraulic machine more than 60 units  
Have continuous production area, fine production area, covering parts production area, single production area

**TRAILER WHEEL**

拖车钢圈

- 采用优质钢材，质量轻，散热快，强度高，有效减少路面冲击，提高车辆行驶平顺性。
- 采用先进的CNC加工制造设备，保证轮毂的真圆度高，可以提高车轮的运动精度。

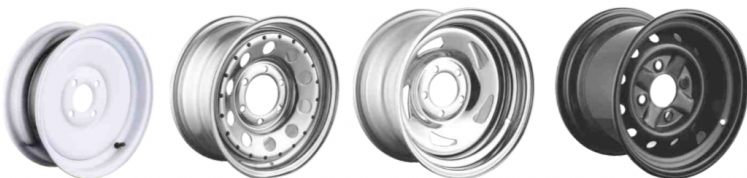

拖车钢圈

技术参数



**QINGDAO MASTERVIM INDUSTRY TECHNOLOGY CO., LTD**

NO.77 HUSHAN ROAD, LICANG DISTRICT, QINGDAO, CHINA

Website: [www.mastervim.com](http://www.mastervim.com) info@mastervim.com

| RIM SIZE          | PCD (MM) | CB (MM)    | ET (MM)  | LOAD CAPACITY (LB) | TYRE SIZE                       |
|-------------------|----------|------------|----------|--------------------|---------------------------------|
| 10x4.5            | 4x100    | 67.5       | 0        | 800                |                                 |
| 10x3.5            | 4x100    | 68         | 0        | 800                |                                 |
| 12x4J             | 4/101.6  | 71.6       | 0        | 1045               | ST145R12 OR4.8-12               |
|                   | 5/114.3  | 75         | 0        | 1100               |                                 |
| 13x4.5J           | 4/100    | 68         | -13~0    | 1100               | ST175/80/R13 OR ST185/80R13     |
|                   | 4X101.6  | 67         | 0        | 1100               |                                 |
|                   | 4/114.3  | 84         | -10~+3   | 1100               |                                 |
|                   | 5/108    | 75         | -10~0    | 1480               |                                 |
|                   | 5/114.3  | 75         | -10~0    | 1480               |                                 |
|                   | 5/114.3  | 81.5       | -10~0    | 1480               |                                 |
| 13x5.5J           | 4/100    | 73         | -10~0    | 1480               | ST185/80R13                     |
|                   | 4X101.6  | 67         | 0        | 1100               |                                 |
|                   | 4/114.3  | 84         | -10~0    | 1480               |                                 |
|                   | 5/108    | 75         | -10~0    | 1480               |                                 |
|                   | 5/114.3  | 75         | -10~0    | 1480               |                                 |
|                   | 5/114.3  | 81.5       | -10~0    | 1480               |                                 |
| 14x5J             | 5-108    | 75         | -5~ +8   | 1870               | ST205/75/R14 for 14x5 or 14x5.5 |
|                   | 5/120.65 | 84         | 0~14     | 1870               |                                 |
|                   | 5-114.3  | 81/84      | -14~0    | 1870               |                                 |
| 14x5.5J<br>OR14X6 | 5/114.3  | 81/84      | 0        | 1870               | 215/75/R14 for 14x6             |
|                   | 4/100    | 75         | -10~22   | 1870               |                                 |
|                   | 4X101.6  | 67         | 0        | 1100               |                                 |
|                   | 4/114.3  | 84         | -10~18   | 1870               |                                 |
|                   | 4/139.7  | 108.7      | -10~18   | 1870               |                                 |
|                   | 5/120.65 | 84         | -4~20    | 1870               |                                 |
|                   | 5/108    | 75         | -10~22   | 1870               |                                 |
|                   | 5/114.3  | 81/84      | -10~18   | 1870               |                                 |
|                   | 5-139.7  | 108.7      | -17~ +15 | 1870               |                                 |
|                   | 5-160    | 125        | -10~ +30 | 1870               |                                 |
|                   | 6/139.7  | 108.7      | -10~18   | 1870               |                                 |
| 6/139.7           | 110      | -10~18     | 1870     |                    |                                 |
| 14*7              | 4-100    | 75         | +4~ +37  | 1870               | 235/60R14                       |
|                   | 5-114.3  | 84         | -10~ +23 | 1870               |                                 |
|                   | 5-139.7  | 108.7      | -3~ +30  | 1870               |                                 |
|                   | 6-139.7  | 108.7      | -3~ +30  | 1870               |                                 |
| 15x5J             | 5/114.3  | 81/84      | -10~10   | 2050               | st205 75r15                     |
|                   | 5/127    | 81/84      | -10~10   | 2050               |                                 |
| 15x6J             | 5/114.3  | 84         | -10~10   | 2150               | 225/75R15                       |
|                   | 5-120.65 | 84         | -22~ +8  | 2150               |                                 |
|                   | 5/127    | 84         | -10~10   | 2150               |                                 |
|                   | 5/139.7  | 108.8      | -10~10   | 2150               |                                 |
|                   | 5/139.7  | 110        | -10~10   | 2150               |                                 |
|                   | 6/139.7  | 108.8      | -10~10   | 2600               |                                 |
|                   | 6/139.7  | 110        | -10~10   | 2600               |                                 |
| 15x7J             | 5/114.3  | 84/75/71.6 | -15~15   | 2600               | 235/75R15                       |
|                   | 5/120.65 | 84         | -15~15   | 2600               |                                 |
|                   | 5/127    | 84         | -15~15   | 2600               |                                 |
|                   | 5/139.7  | 108        | -15~15   | 2600               |                                 |
|                   | 5/139.7  | 110        | -15~15   | 2600               |                                 |
|                   | 6/139.7  | 108        | -15~15   | 2600               |                                 |
|                   | 6/139.7  | 110.5      | -15~15   | 2600               |                                 |
|                   | 8x165.1  | 130.8      | -15~15   | 2600               |                                 |
| 15x8J             | 5/114.3  | 84/75/71.6 | -25~15   | 2600               |                                 |
|                   | 5/114.3  | 84         | -25~15   | 2600               |                                 |
|                   | 5/120.65 | 84         | -25~15   | 2600               |                                 |
|                   | 5/127    | 75         | -25~15   | 2600               |                                 |
|                   | 5/127    | 84         | -25~15   | 2600               |                                 |

**QINGDAO MASTERVIM INDUSTRY TECHNOLOGY CO., LTD**

NO.77 HUSHAN ROAD, LICANG DISTRICT, QINGDAO, CHINA

Website: [www.mastervim.com](http://www.mastervim.com) info@mastervim.com

|                |          |               |          |        |                      |
|----------------|----------|---------------|----------|--------|----------------------|
|                | 5/139.7  | 108           | -25~15   | 2600   |                      |
|                | 5/139.7  | 110           | -25~15   | 2600   |                      |
|                | 5X160    | 110           | -25~16   | 2600   |                      |
|                | 5x165.1  | 125           | -25~17   | 2600   |                      |
|                | 6/139.7  | 108           | -25~15   | 2600   |                      |
|                | 6/139.7  | 110           | -25~15   | 2600   |                      |
|                | 15x8     | 8x165.1       | 130.8    | -15~15 |                      |
| 15x9J          | 5/114.3  | 84/75/71.6    | -25~15   | 2600   |                      |
|                | 5/114.3  | 84            | -25~15   | 2600   |                      |
|                | 5/120.65 | 84            | -25~15   | 2600   |                      |
|                | 5/127    | 75            | -25~15   | 2600   |                      |
|                | 5/127    | 84            | -25~15   | 2600   |                      |
|                | 5/139.7  | 108           | -25~15   | 2600   |                      |
|                | 5/139.7  | 110           | -25~15   | 2600   |                      |
|                | 5X160    | 110           | -25~16   | 2600   |                      |
|                | 5x165.1  | 125           | -25~17   | 2600   |                      |
|                | 6/139.7  | 108           | -25~15   | 2600   |                      |
|                | 6/139.7  | 110           | -25~15   | 2600   |                      |
| 15*10 or 15X12 | 5-114.3  | 84/75/71.6    | -46~ +58 | 2600   | 325/50 R15 FOR 15X10 |
|                | 5-120.65 | 84            | -46~ +58 | 2600   |                      |
|                | 5-139.7  | 108.7/110     | -46~ +58 | 2600   |                      |
|                | 5-139.7  | 108.7/110     | -46~ +58 | 2600   |                      |
|                | 5X160    | 110           | -25~16   | 2600   |                      |
|                | 5x165.1  | 125           | -25~17   | 2600   |                      |
|                | 6-139.7  | 108.7/110     | -46~ +58 | 2600   |                      |
| 15x10          | 8x165.1  | 130.8         | -32      | 2600   |                      |
| 16x6J          | 5-114.3  | 84            | -17~ +6  | 3200   | 235/85 R16           |
|                | 5-150    | 112           | 0~ +10   | 3200   |                      |
|                | 5-139.7  | 108.7/110     | -17~ +10 | 3200   |                      |
|                | 5-165    | 124           | 0~ +15   | 3200   |                      |
|                | 6/139.7  | 108.7         | 0        | 3200   |                      |
|                | 6-114.3  | 84            | -17~ +6  | 3200   |                      |
|                | 6/165.1  | 130.8         | 0        | 3200   |                      |
|                | 8/165.1  | 124           | 0        | 3500   |                      |
|                | 8/165.1  | 125.7         | 0        | 3500   |                      |
|                | 8/165.1  | 130.8         | 0        | 3500   |                      |
| 16x7J          | 5-114.3  | 84/75/71.6    | -15~ +5  | 3200   | 245/75/R16           |
|                | 6-114.3  | 84            | -15~ +5  | 3200   |                      |
|                | 5-120.65 | 75/84         | -12~ +35 | 3200   |                      |
|                | 5/139.7  | 108.7         | -25~15   | 3200   |                      |
|                | 5/150    | 112           | 0~5      | 3200   |                      |
|                | 5/165.1  | 125           | 0~8      | 3200   |                      |
|                | 6/139.7  | 108.7         | -25~15   | 3200   |                      |
|                | 6/139.7  | 110.1         | -28~0    | 3200   |                      |
|                | 8/165.1  | 116/124/130.8 | -25~15   | 3500   |                      |
| 16x8J          | 5-114.3  | 84/75/71.6    | -15~ +5  | 3200   | 285/75r16            |
|                | 6-114.3  | 84            | -15~ +5  | 3200   |                      |
|                | 5-120.65 | 75            | -12~ +35 | 3500   |                      |
|                | 5-120.65 | 84            | -12~ +35 | 3500   |                      |
|                | 5/139.7  | 108.7         | -25~15   | 3500   |                      |
|                | 5/150    | 112           | 0~5      | 3500   |                      |
|                | 5/165.1  | 125           | 0~8      | 3500   |                      |
|                | 6/139.7  | 108.7         | -25~15   | 3500   |                      |
|                | 6/139.7  | 110.1         | -28~0    | 3500   |                      |
|                | 8/165.1  | 116/124/130.8 | -25~15   | 3500   |                      |
| 16x10J         | 5-120.65 | 75            | -12~ +35 | 3500   | 365/75R16            |
|                | 5-120.65 | 84            | -12~ +35 | 3500   |                      |
|                | 5-114.3  | 84/75/71.6    | -15~ +5  | 3200   |                      |
|                | 6-114.3  | 84            | -15~ +5  | 3200   |                      |
|                | 5/139.7  | 108.7         | -25~15   | 3500   |                      |

|             |         |            |        |      |           |
|-------------|---------|------------|--------|------|-----------|
|             | 5/150   | 112        | 0~5    | 3500 |           |
|             | 5/165.1 | 125        | 0~8    | 3500 |           |
|             | 6/139.7 | 108.7      | -35~30 | 3500 |           |
|             | 6/139.7 | 110.1      | -28~0  | 3500 |           |
|             | 8/165.1 | 130.8      | -25~15 | 3500 |           |
| <b>17X8</b> | 6X139.7 | 108.7      | -6     | 3200 | 285 75R17 |
| <b>17x8</b> | 5x127   | 84         | 0      | 3200 |           |
| <b>17x8</b> | 5x139.7 | 108.7or110 | 0      | 3200 |           |